


SCOTTY OPERATING INSTRUCTIONS

WAGON-MASTER WALL FURNACE

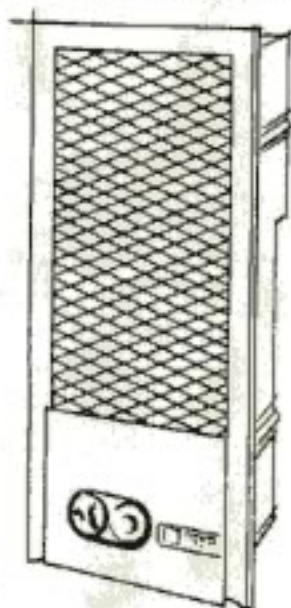

LIGHTING INSTRUCTIONS


1. Push in on valve knob and turn to off position.
2. Wait 5 minutes before attempting to light.
3. Push in on valve knob and turn to pilot.
4. Hold valve knob in and light pilot. (Pilot is lit by sliding cover in burner tube aside and placing a match in exposed hole.)
5. Hold valve knob in until flame remains lighted.
6. To operate heater, turn to "on." For shut down, turn to "off."
7. Turn temperature dial to desired position.
8. NOTE: If pilot goes out, repeat above.

Approved by The American Gas Association.

IMPORTANT: Keep control compartment of furnace clean at all times.

SCOTTY OPERATING INSTRUCTIONS

GAS BOTTLE

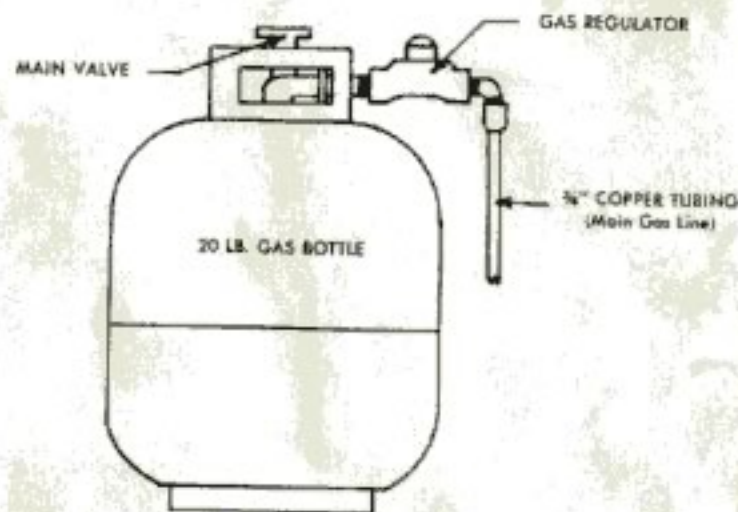

All gas appliances are controlled thru the main gas valve and regulator located on top of the gas bottle.

1. A Regulator must be installed between the main valve and the main gas line to control the flow of gas to all appliances. This regulator is set to produce 11 inches water column pressure (3.6 ounces per square inch).

Your gas bottle when filled, will contain liquified petroleum gas. It is recommended that Commercial Propane be used and not Butane. Butane will freeze at 18°F. and the appliances will not operate properly when equipped with this gas under 30°F.

As a safety precaution, the main gas valve should be closed any time appliances are not in use. Children have a tendency to play with appliance control knobs.

A consistent loss of gas pressure is an indication that your gas supply is running low and the bottle should be refilled.